


Factory Configured Input Signal:  
 -V Model: 0-10VDC  
 -A Model: 4-20mA  
 (Custom inputs available)

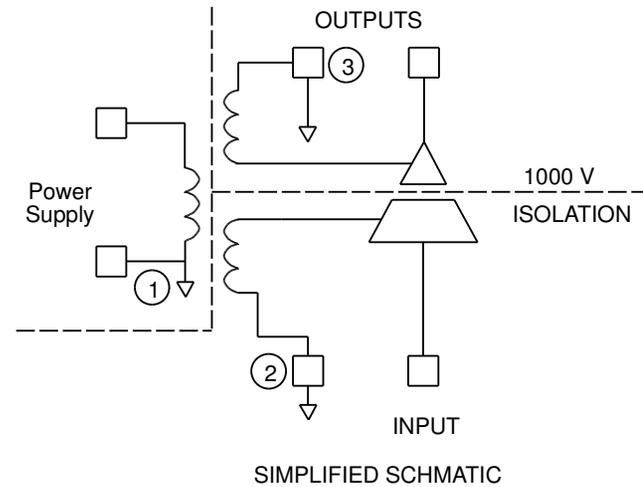

Power Supply, Input and Output are all isolated;  
 1000 VDC isolation (minimum)

4-20mA and 0-10VDC may be used simultaneously,  
 however they are not isolated from one another.

Current output (sourcing) Loop  $R_{max} < 850\Omega$ .

**ELKOR** Technologies Inc.

DRAWN: PCK	TITLE: ETISO - Analog Signal Isolator	CODE:
CHECKED: CKK		
DATE: 2018/11/30	FILE: ..\ETISOv4.t4g	SHEET: 1 OF 1