

LOOP POWERED DEVICE


Loop Excitation: 8 - 35VDC

Max Loop Impedance: 1000R @ 24V SUPPLY

Input Range (see product label)

Accuracy: 0.3% + External CT Accuracy
crest factors up to 4.

NOTE: THIS IS A LOW POWER, LOW VOLTAGE
DEVICE (CLASS 2). USE ONLY WITH RECOGNIZED
LOW VOLTAGE/LOW CURRENT OUTPUT DEVICES
(ie: ELKOR MSCTx or MCTA)

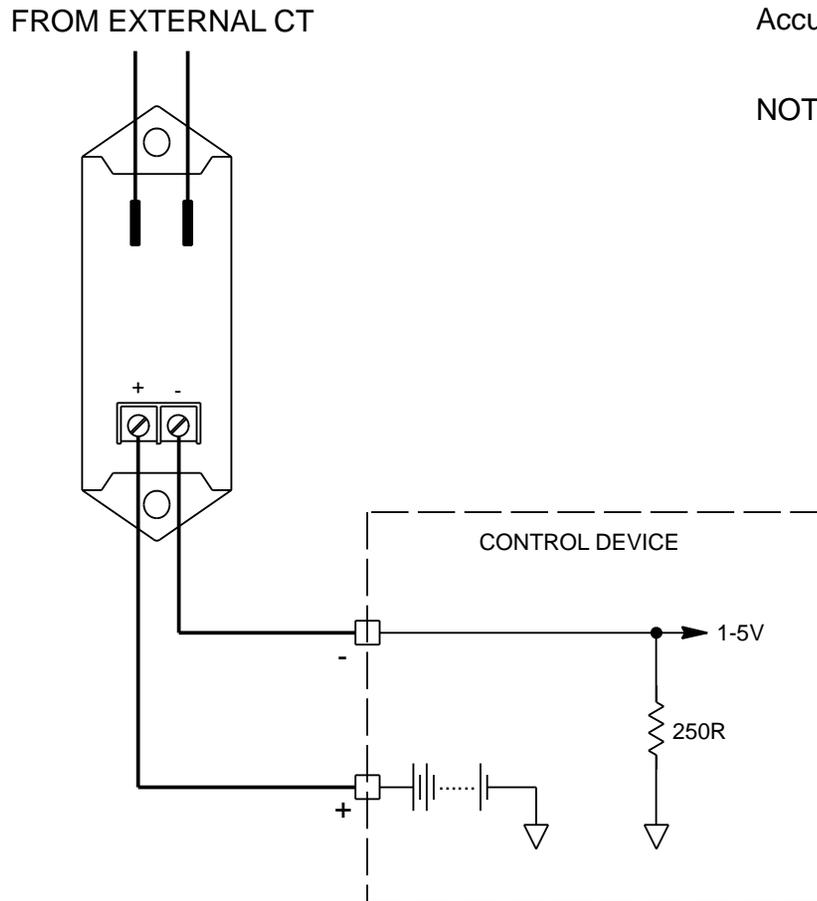

ELKOR Technologies Inc.

DRAWN: PCK	TITLE: i-Snail-X: 4-20 mA Loop Powered Voltage Transducer	CODE:
CHECKED: CKK		
DATE: 7/21/2005	FILE: i-Snail-X.t4g	SHEET: 1 OF 1